

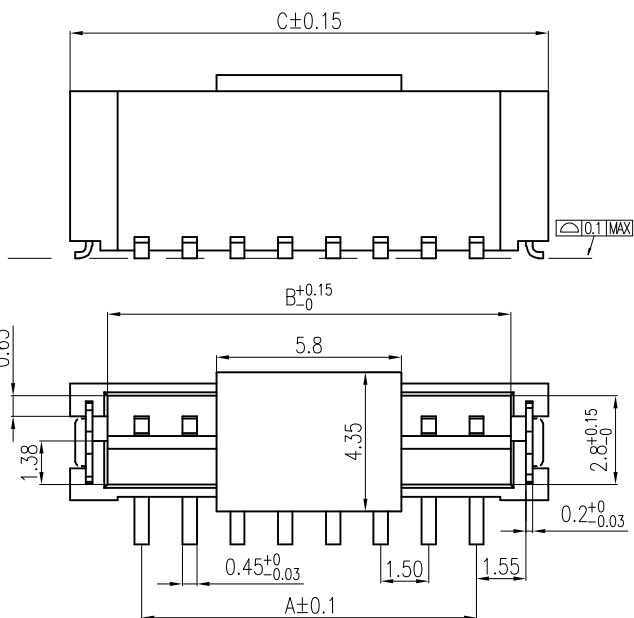


REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	12/30-'20	ZW

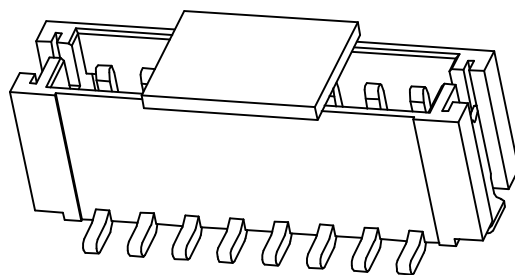

截面 A-A

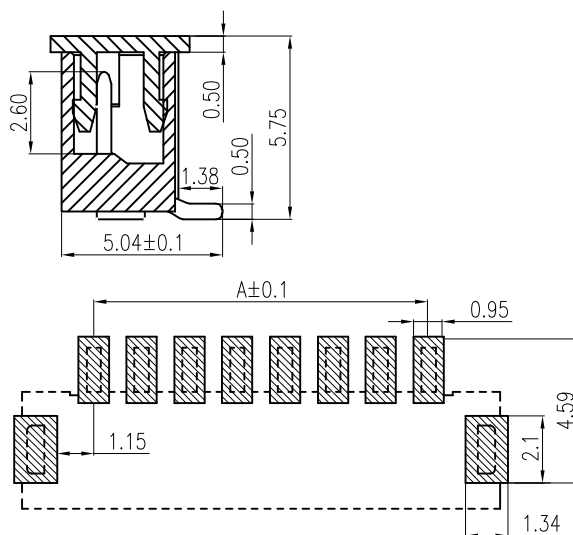

Specifications

- 1.Current Rating: 1Amps
- 2.rated voltage: 125V AC/DC
- 3.Insulation Resistance: 500 MΩ Min.
- 4.Dielectric withstanding Voltage: 500V AC
- 5.Contact Resistance: 20 mΩ Max.
- 6.Operating Temperature: -25°C to+85°C
- 7.Contact : Phosphor Bronze,Plating Sn
- 8.Positioning pin:Phosphor Bronze,Plating Sn
- 9.Insulation Material: LCP(E130I),UL94V-0
- 10.Cap: LCP(E130I),UL94V-0
- 11.Marked "*" symbol are major dimensions.

Ordering Information

LA1501- XX XX S X X XX X

NO.of Pins Per Row	Insulation Height	Insulator Material	Contact Plating	Serial NO. 01-99	Packing A=PE Bag B=Tube C=Tray D=Reel
01-99P	44=4.4mm	1:PBT 2:LCP 3:NY46 4:NY66 5:NY6T 6:NY9T	1: Au1u" 2: Au3u" 3: Au5u" 4: Au10u" 5: Au15u" 6: Au30u" 7:Gold/Tin 8: Tin 9: Customized		

Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C
2P	1.5	3.66	6.02	12P	16.5	18.66	21.02
3P	3.0	5.16	7.52	13P	18.0	20.16	22.52
4P	4.5	6.66	9.02	14P	19.5	21.66	24.02
5P	6.0	8.16	10.52	15P	21.0	23.16	25.52
6P	7.5	9.66	12.02	16P	22.5	24.66	27.02
7P	9.0	11.16	13.52	17P	24.0	26.16	28.52
8P	10.5	12.66	15.02	18P	25.5	27.66	30.02
9P	12.0	14.16	16.52	19P	27.0	29.16	31.52
10P	13.5	15.66	18.02	20P	28.5	30.66	33.02
11P	15.0	17.16	19.52				

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

LDCONN 东莞连大精密制品有限公司
連大 DongGuan LianDa Precision Products Co., LTD

TITLE	WF-LQ PH1.5 1XNP 立贴带帽 贝吉色	DRAWN BY	ZW	12/30-'20
PART NO.	LA1501-XX44S28XXD	CHECKED BY		
DRAWING NO.	—	APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4