



REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW	12/30-'20	ZW

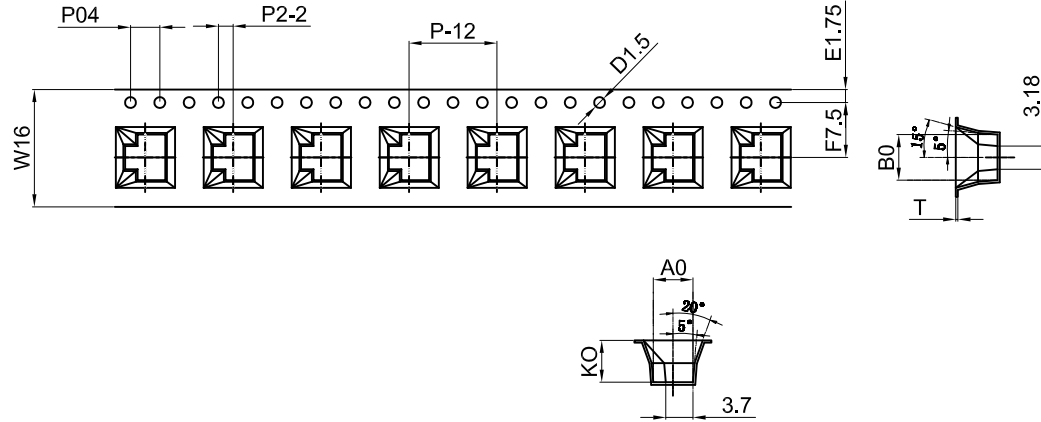

卷装示意图仅供参考

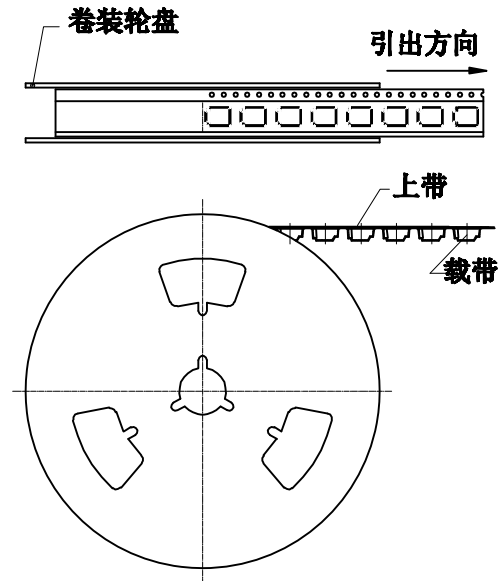


尺寸栏

E	1.75±0.10
F	7.5±0.10
P2	2.00±0.10
∅D	1.50± 0.10 0.00
Po	4.00±0.10
W	16.00±0.30
P	12.0±0.10
Ao	5.40±0.10
B0	6.25±0.10
KO	5.75±0.10
t	0.35±0.05

A-A
说明

- 10个边孔的紧计公差不能超过±0.2mm
- 材料规格;PS 白色料抗静电, 厚度 0.35mm
- 13英寸卷轮卷装长度;12.576米, 包装零件总颗数;1048颗, 每盘实包颗数;1000颗
- 所有尺寸设计参照EIA-481-C-2003.
- 载带在250mm长度内最大弯曲不能超过1mm
见上图

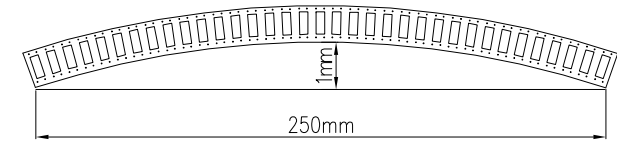

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

LDCONN 东莞连大精密制品有限公司
DongGuan LianDa Precision Products Co., LTD

TITLE	WF-LQ PH1.5 1XNP 立贴带帽包规图	DRAWN BY	ZW	12/30-'20
PART NO.	LA1501-XX44S28XXD	CHECKED BY		
DRAWING NO.		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4