

SPECIFICATION

MATERIAL:

Housing:PBT+30%G. F UL94V-0

Contacts:Copper Alloy

ELECTRICAL:





Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage:1000 VAC/minute

Operating temperature: -55° C TO +125° C

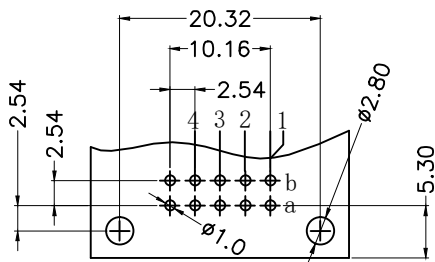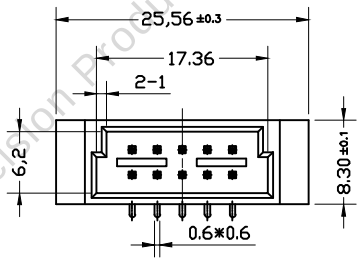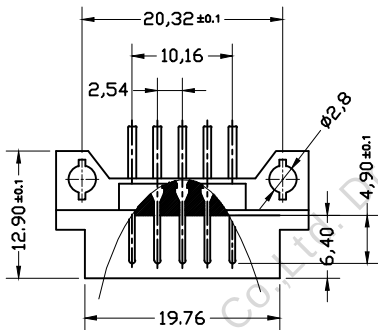

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

Pitch	Position	Rows with Contacts	Contact Arrange
2.54	10	A B	
	5	A -	
5.08	6	A B	
	3	A -	



公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°.	±2°
.XX	±0.15	.XX°.	±1°
.XXX	±0.02	.XXX°.	±0.5°
日期 Date	2009. 04. 15		

欧式插座DIN 41612 210弯针公座

Housing:PBT+30%G. F UL94V-0
Contacts:Copper Alloy

Operating temperature: -55°C TO $+125^{\circ}\text{C}$



Pitch	Position	Rows with Contacts	Contact Arrange
2.54	16	A B	
	8	A -	
5.08	8	A B	
	4	A -	

公差一览表			
TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.02	.XXX°	±0.5°
日期 Date		2009. 04. 15	

欧式插座DIN 41612 216弯针公座

SPECIFICATION

MATERIAL:

Housing:PBT+30%G. F UL94V-0

Contacts:Copper Alloy

ELECTRICAL:





Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage:1000 VAC/minute

Operating temperature: -55° C TO +125° C

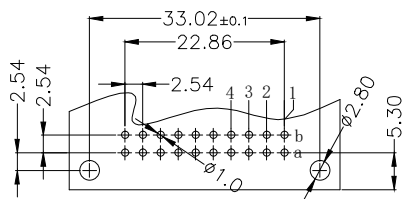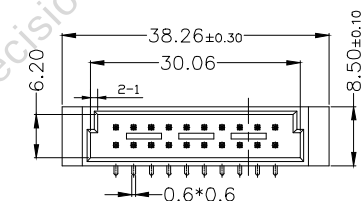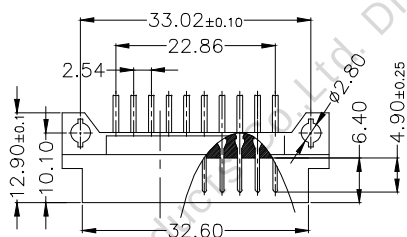

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

Pitch	Position	Rows with Contacts	Contact Arrange
2.54	20	A B	
	10	A -	
5.08	10	A B	
	5	A -	

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.02	.XXX°	±0.5°
日期 Date	2009. 04. 15		

欧式插座DIN 41612 220弯针公座

SPECIFICATION

MATERIAL:

Housing:PBT+30%G. F UL94V-0

Contacts:Copper Alloy

ELECTRICAL:





Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage:1000 VAC/minute

Operating temperature: -55° C TO +125° C

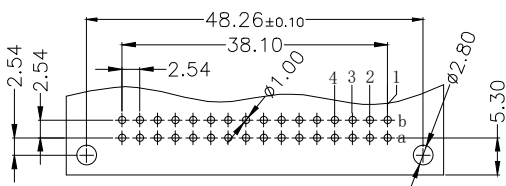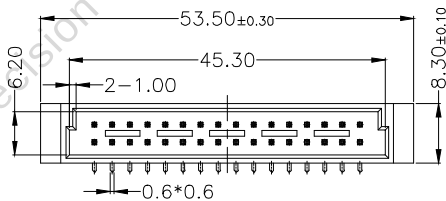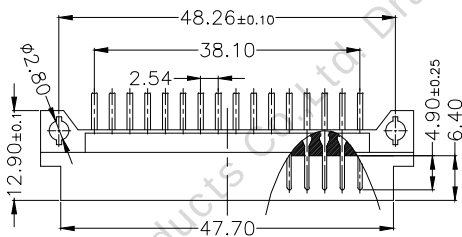

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

Pitch	Position	Rows with Contacts	Contact Arrange
2.54	32	A B	
	16	A -	
5.08	16	A B	
	8	A -	

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.02	.XXX°	±0.5°
日期 Date	2009. 04. 15		

欧式插座DIN 41612 232弯针公座

SPECIFICATION

MATERIAL:

Housing:PBT+30%G. F UL94V-0

Contacts:Copper Alloy

ELECTRICAL:





Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage:1000 VAC/minute

Operating temperature: -55° C TO +125° C

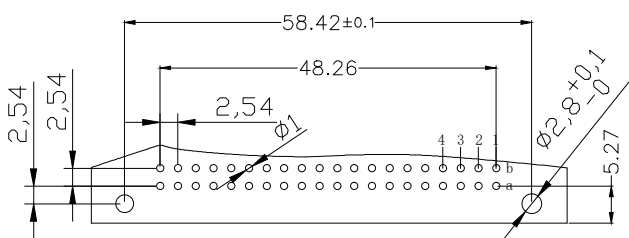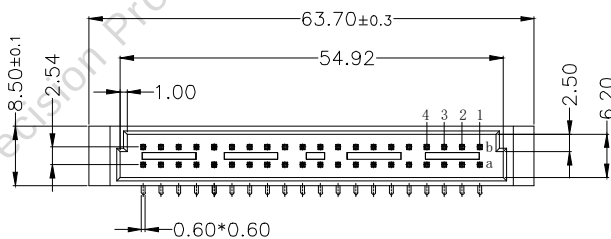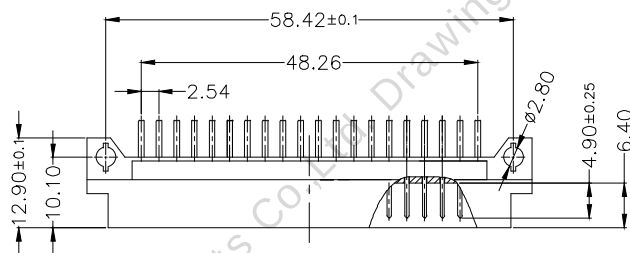

Pitch	Position	Rows with Contacts	Contact Arrange
2.54	40	A B	
	20	A -	
5.08	20	A B	
	10	A -	

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL. :±0.05)

公差一览表			
TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.02	.XXX°	±0.5°
日期 Date	2021-10-09		

欧式插座DIN 41612 240弯针公座





SPECIFICATION

MATERIAL:

Housing:PBT+30%G. F UL94V-0
Contacts:Copper Alloy

ELECTRICAL:

Current rating: 2 Amps .
Contact resistance: 20 mΩ initial
Insulation resistance: 1000 MΩ min @ 500 VDC
Dielectric withstanding voltage:1000 VAC/minute
Operating temperature: -55° C TO +125° C

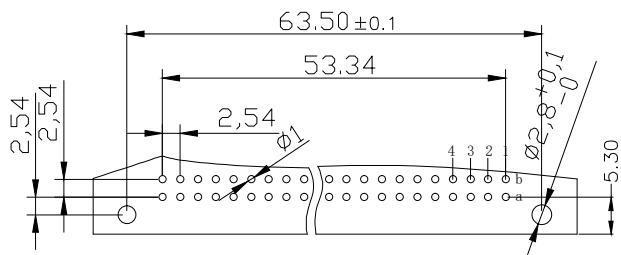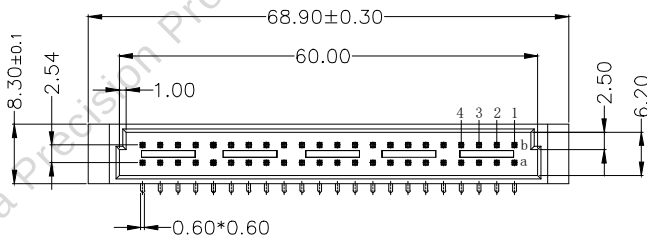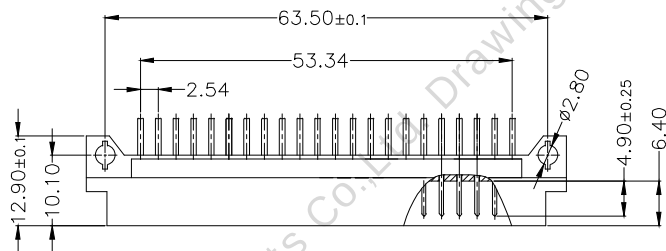

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

Pitch	Position	Rows with Contacts	Contact Arrange
2.54	44	A B	
	22	A -	
5.08	22	A B	
	11	A -	

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.02	.XXX°	±0.5°
日期 Date	2009. 04. 15		

欧式插座DIN 41612 244弯针公座

SPECIFICATION

MATERIAL:

Housing:PBT+30%G. F UL94V-0

Contacts:Copper Alloy

ELECTRICAL:





Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage:1000 VAC/minute

Operating temperature: -55° C TO +125° C

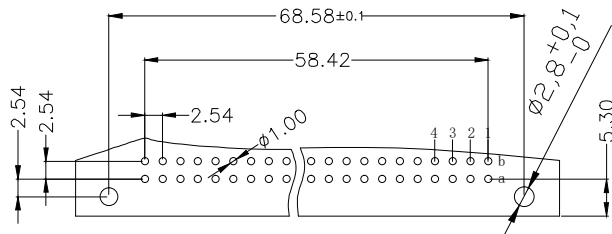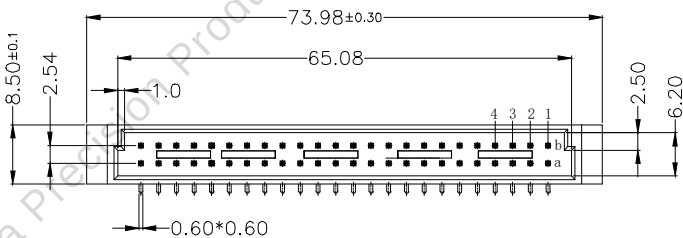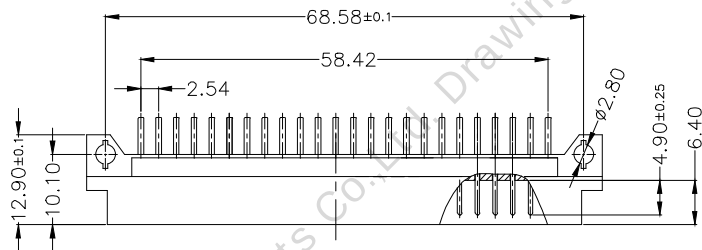

Pitch	Position	Rows with Contacts	Contact Arrange
2.54	48	A B	
	24	A -	
5.08	24	A B	
	12	A -	

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL. :±0.05)

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.02	.XXX°	±0.5°
日期 Date	2009. 04. 15		

欧式插座DIN 41612 248弯针公座

SPECIFICATION

MATERIAL:

Housing:PBT+30%G. F UL94V-0

Contacts:Copper Alloy

ELECTRICAL:





Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage:1000 VAC/minute

Operating temperature: -55° C TO +125° C

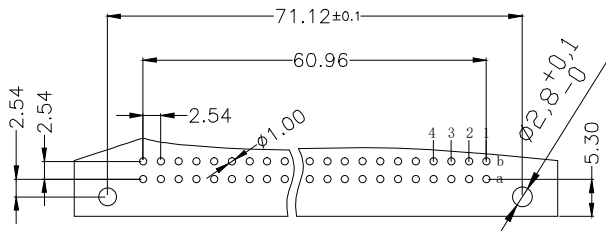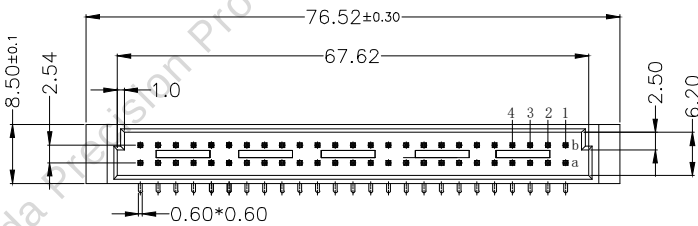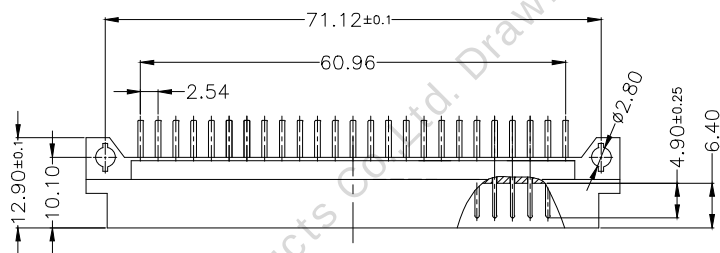

Pitch	Position	Rows with Contacts	Contact Arrange
2.54	50	A B	
	25	A -	
5.08	26	A B	
	13	A -	

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL. :±0.05)

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.02	.XXX°	±0.5°
日期 Date	2009. 04. 15		

欧式插座DIN 41612 250弯针公座

SPECIFICATION

MATERIAL:

Housing:PBT+30%G. F UL94V-0

Contacts:Copper Alloy

ELECTRICAL:





Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage:1000 VAC/minute

Operating temperature: -55° C TO +125° C

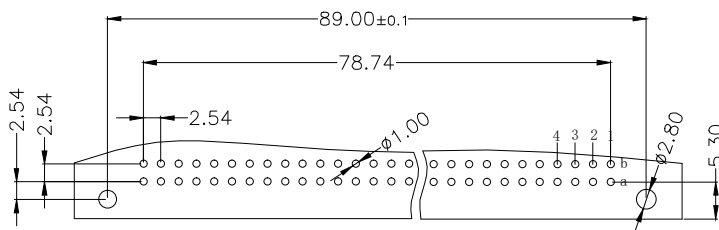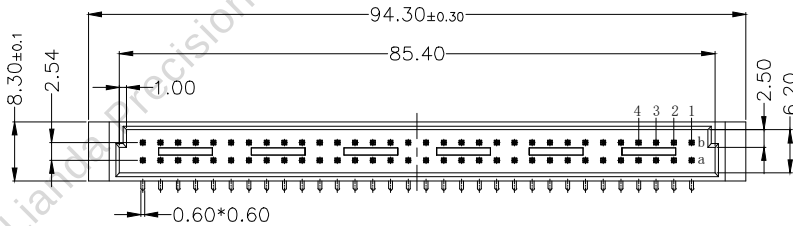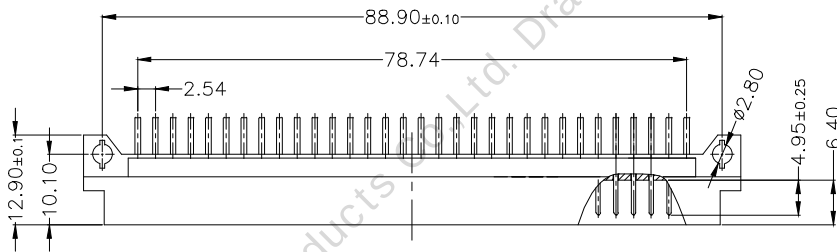

Pitch	Position	Rows with Contacts	Contact Arrange
2.54	64	A B	
	32	A -	
5.08	32	A B	
	16	A -	

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL. :±0.05)

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X°.	±5°
.X	±0.20	.X°	±2°
.XX	±0.15	.XX°	±1°
.XXX	±0.02	.XXX°	±0.5°
日期 Date	2009. 04. 15		

欧式插座DIN 41612 264弯针公座